

RT-7200

Auto Hematology Analyzer

NEW




Features

- 20 parameters+3 histograms
- 3-part differentiation of WBC
- 2 Counting mode: whole blood and prediluted
- Throughput: 30 samples per hour
- 8.0" TFT color LCD with mouse operation
- Built-in thermal printer, optional external printer
- External AC adapter avoids electronic noises, enhancing accuracy
- Up to 30000 sample results (including histograms) can be stored
- Multi-language software available on request

RT-7200

Auto Hematology Analyzer

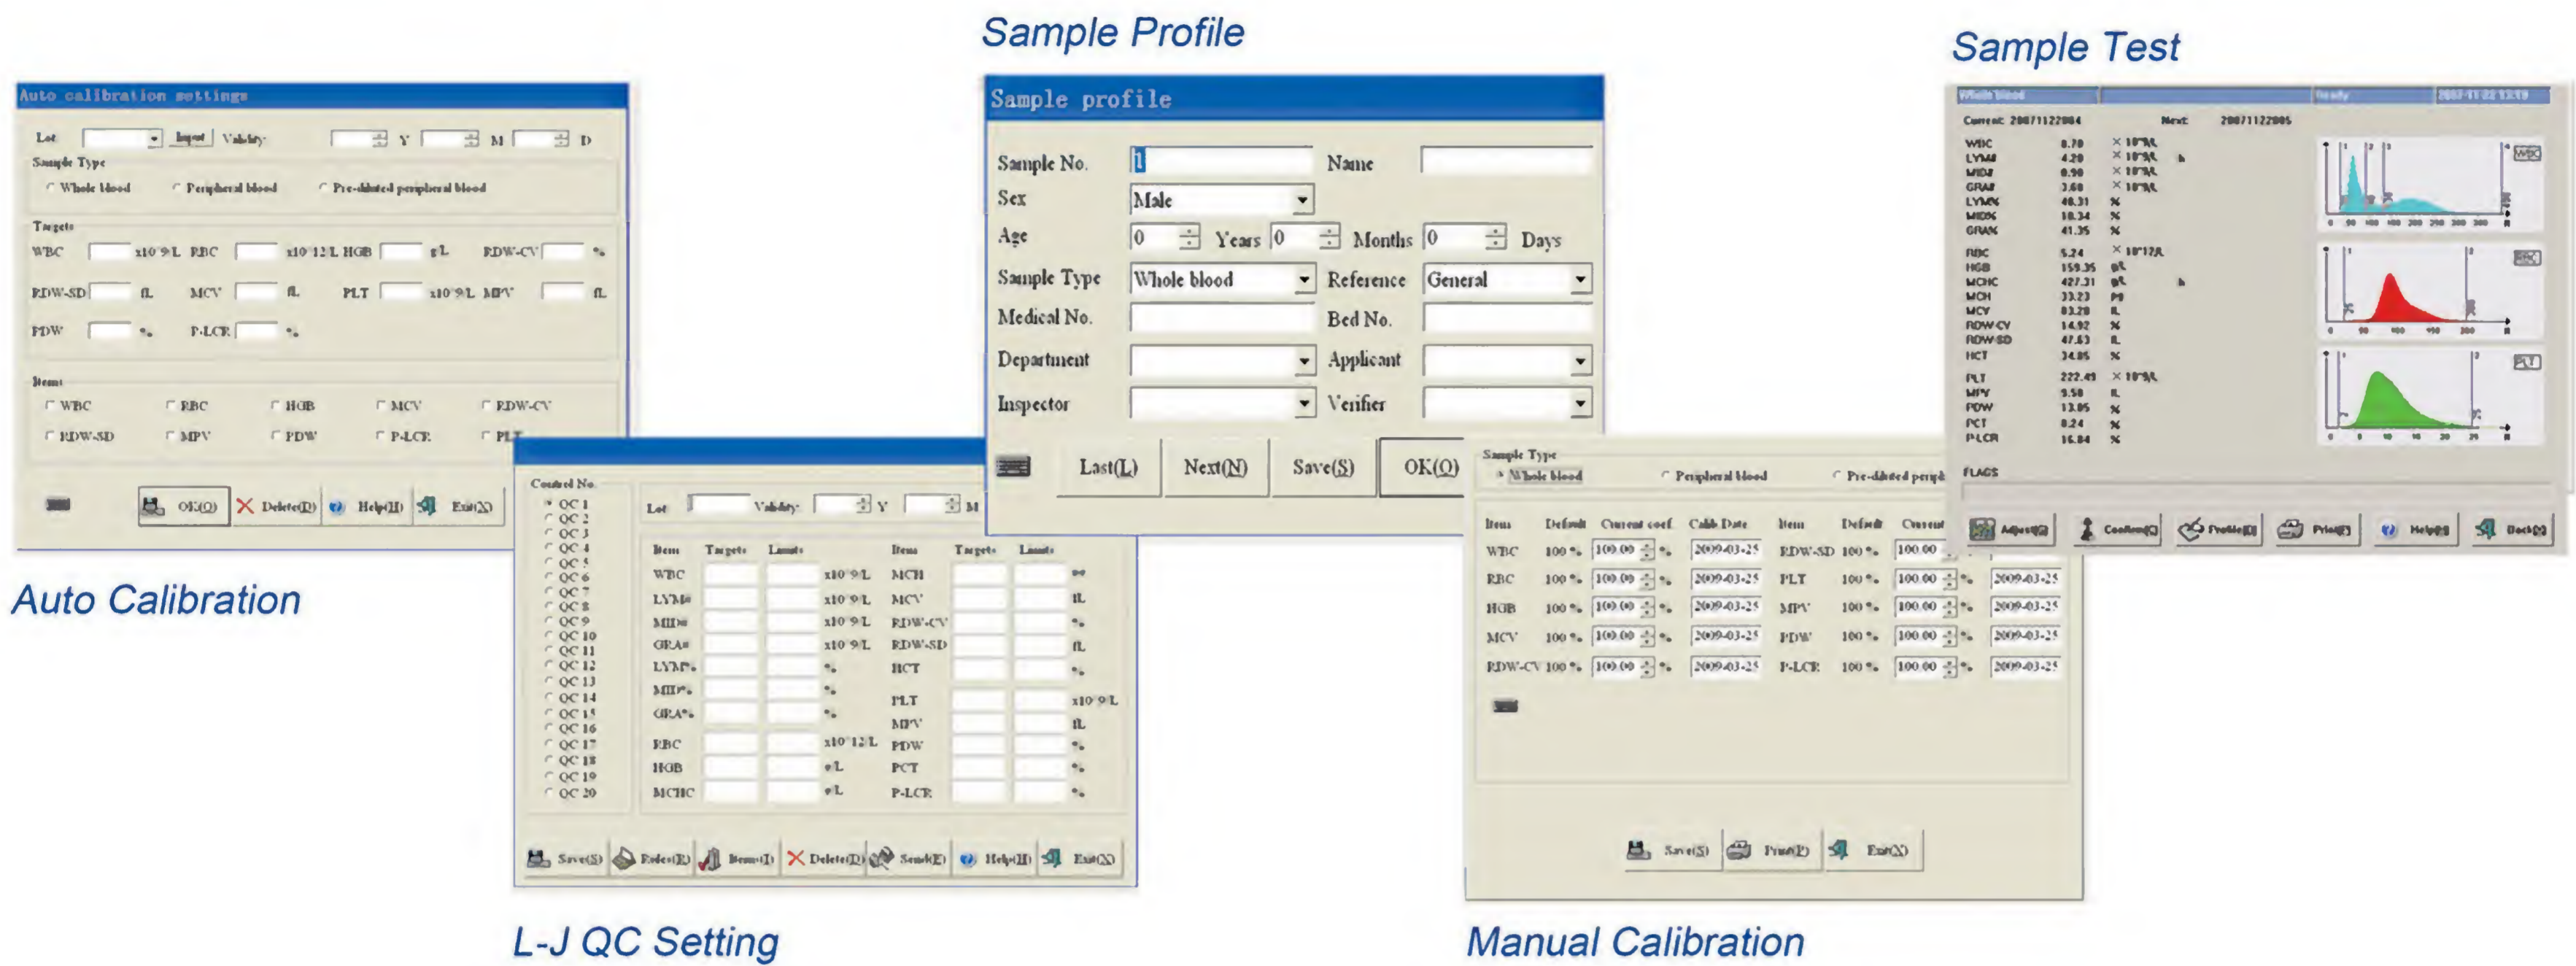

Technical Specifications

Parameters	WBC, LYM#, MID#, GRA#, LYM%, MID%, GRA%, RBC, HGB, MCHC, MCH, MCV, HCT, RDW-CV, RDW-SD, PLT, MPV, PDW, PCT, P-LCR and Histograms for WBC, RBC and PLT
Principle	Electrical resistance for counting WBC, RBC and PLT
Sample Volume	Pre-diluted:20 μ L; Whole Blood:9.8 μ L
Aperture Diameter	60 μ m
Throughput	30 samples per hour
Display	8.0" TFT color LCD with mouse operation
Alarms	Error messages
Input/Output	RS-232, USB, LAN, keyboard and mouse interface
Printout	Thermal recorder, 55mm width paper, various printout formats, external printer optional
Operating Environment	Temperature: 15 $^{\circ}$ C~35 $^{\circ}$ C; Humidity:10%~90%
Power Requirement	AC 100-240V, 50-60 \pm 1Hz
Dimension	L \times W \times H(mm):468 \times 325 \times 395
Weight	16.5Kg



CV. MITRA PERKASA
 Jl. Kapi Janula 15 D / 14, Malang
 Telp: (0341) 5473579, 7039809
 Fax: (0341) 722839



Rayto Life and Analytical Sciences Co.,Ltd.